

NOTES:

- THESE ARE FINISHED DIMENSIONS READY FOR THE LINER.
- DIMENSIONS ARE FROM INSIDE POOL PANELS.
- ROPE AND FLOAT ASSEMBLY SHOULD BE INSTALLED IN ACCORDANCE WITH CURRENT ANSI/ASPS/ICC REGULATIONS
- 4. HYDRA LINER TRACK FOR STEPS IS INSTALLED WITH THE BARB FACING THE RISER WALL ON THE STEP.

EXCAVATION NOTES:


- ROUGH EXCAVATION SHOULD BE 2" DEEPER IN EACH INSTANCE.
- S. SOIL TO HAVE MINIMUM BEARING CAPACITY OF 1500 PSF.
- LOCATE TOP OF POOL AT LEAST 6" ABOVE THE SURROUNDING LAND ELEVATION.
- B. SEE "OVER DIG DETAIL" FOR EXCAVATION AROUND POOL.
- 9. FILL VOIDS UNDER BASE OF PANELS AND TAMP WELL.
- 10. BACK FILL WITH NON-EXPANSIVE MATERIAL.
- 11. FOLLOW ALL CURRENT ANSI / APSP / ICC GUIDELINES FOR RESIDENTIAL POOLS

IMPORTANT NOTES:

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. THE DEALER OR CONTRACTOR WHO SELLS OR INSTALLS YOUR POOL IS AN INDEPENDENT CONTRACTOR AND IS NOT AN AGENT OF THE MANUFACTURER. THE CONSTRUCTION METHODS ILLUSTRATED HERE ARE SUGGESTIONS AND APPLY ONLY TO NORMAL GROUND CONDITIONS. THERE MAY BE ADDITIONAL PRECAUTIONS AND/OR METHODS OF CONSTRUCTION. PROPER INSTALLATION IS THE RESPONSIBILITY OF THE DEALER/BUILDER/CONTRACTOR.

(DESCRIPTION	CUSTOMER	VENDOR	0.717
ITE	M FILE NAME	DESCRIPTION	DRAWING#	PART#	QTY.
1	BOLT, PACK	BOLT, FLANGE, 3/8-16 X 1", PACK (50)	HPS1916	HPS1916	3
2	SBRACE	BRACE, FOLD OVER WITH TURNBUCKLE, STEEL, HPSFOB	HPSFOB	HPSFOB	10
3	PANEL, RADIUS	PANEL, 2' RADIUS, 3-2" LONG, 700 SERIES	HPSE2R	00002541	4
4	PANEL, STRAIGHT	PANEL, 8' LONG, 1084, 700 SERIES	HPSE10884	00004966	1
5	PANEL, STRAIGHT	PANEL, 8' LONG, INLET, 700 SERIES	HPSE108I	00004969	3
6	PANEL, STRAIGHT	PANEL, 8' LONG, LIGHT, 700 SERIES	HPSE108L	00004962	1
7	HS110N	STEP 8' TWIN SEAT 4 TREAD	HS110N	HS110N	1

	WEIGHT: bs VOLUME: Inch ³	TOLERANCES	BUMPHREY DETAILED BY:	6/4/2013 DETAILED DATE:	HYDRA POOLS
ENGINEERING DRAWING NU 00016883	COLOR: NA HEAT TREAT: NA FINISH:	DECIMALS: X ± .1	BUMPHREY LAST REVISED BY: bumphrey MATERIAL:	12/6/2017 LAST REVISED DATE: 12/6/2017	TITLE: LAYOUT, 12' X 20', RECTANGLE, 2' RADIUS, 6' DEEP, HS110N, LIGHT, 1084, 700 SERIES
	NA TEXTURE:	©			PART NUMBER: 00016883 SCALE: 1:96 SHEET: 1 OF 3 A

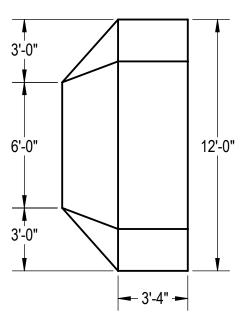

NON-DIVING
DIVING EQUIPMENT PROHIBITED

R2'-0"
4 PLCS.

Area: 236.57ft ^2 Perimeter: 60.57ft

Volume = 8062 US gallons


NOTES:

- THESE ARE FINISHED DIMENSIONS READY FOR THE LINER.
- 2. DIMENSIONS ARE FROM INSIDE POOL PANELS.
- ROPE AND FLOAT ASSEMBLY SHOULD BE INSTALLED IN ACCORDANCE WITH CURRENT ANSI/ASPS/ICC REGULATIONS
- HYDRA LINER TRACK FOR STEPS IS INSTALLED WITH THE BARB FACING THE RISER WALL ON THE STEP.


EXCAVATION NOTES:

- 5. ROUGH EXCAVATION SHOULD BE 2" DEEPER IN EACH INSTANCE.
- 6. SOIL TO HAVE MINIMUM BEARING CAPACITY OF 1500 PSF.
- LOCATE TOP OF POOL AT LEAST 6" ABOVE THE SURROUNDING LAND ELEVATION.
- SEE "OVER DIG DETAIL" FOR EXCAVATION AROUND POOL.
- 9. FILL VOIDS UNDER BASE OF PANELS AND TAMP WELL.
- 10. BACK FILL WITH NON-EXPANSIVE MATERIAL.
- 11. FOLLOW ALL CURRENT ANSI / APSP / ICC GUIDELINES FOR RESIDENTIAL POOLS IMPORTANT NOTES:

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. THE DEALER OR CONTRACTOR WHO SELLS OR INSTALLS YOUR POOL IS AN INDEPENDENT CONTRACTOR AND IS NOT AN AGENT OF THE MANUFACTURER. THE CONSTRUCTION METHODS ILLUSTRATED HERE ARE SUGGESTIONS AND APPLY ONLY TO NORMAL GROUND CONDITIONS. THERE MAY BE ADDITIONAL PRECAUTIONS AND/OR METHODS OF CONSTRUCTION. PROPER INSTALLATION IS THE RESPONSIBILITY OF THE DEALER/BUILDER/CONTRACTOR.

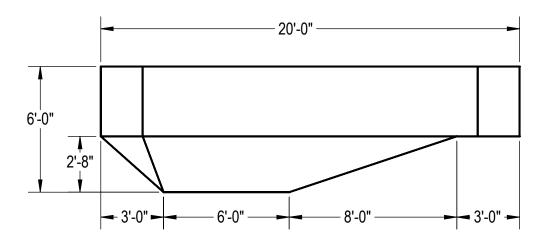

III OO016883	VOLUME: Inch³	TOLERANCES DECIMALS: X ± .1	BUMPHREY DETAILED BY: BUMPHREY	6/4/2013 DETAILED DATE: 12/6/2017 LAST REVISED DATE:	HYDRA POOLS ETITLE: LAYOUT, 12' X 20', RECTANGLE, 2' RADIUS, 6' DEEP.	
	HEAT TREAT: NA FINISH: NA TEXTURE:	T: XXXX ± .0005 ANGULAR: X ± 0.5 THIRD ANGLE DROJECTION	bumphrey 12/6/2017 MATERIAL:		HS110N, LIGHT, 1084, 700 SERIES	
- L	NA	○ □			PART NUMBER: 00016883 SCALE: 1.96 SHEET: 2 OF 3	\
C:\PDI	Mworking\to chec	k in\00016883				

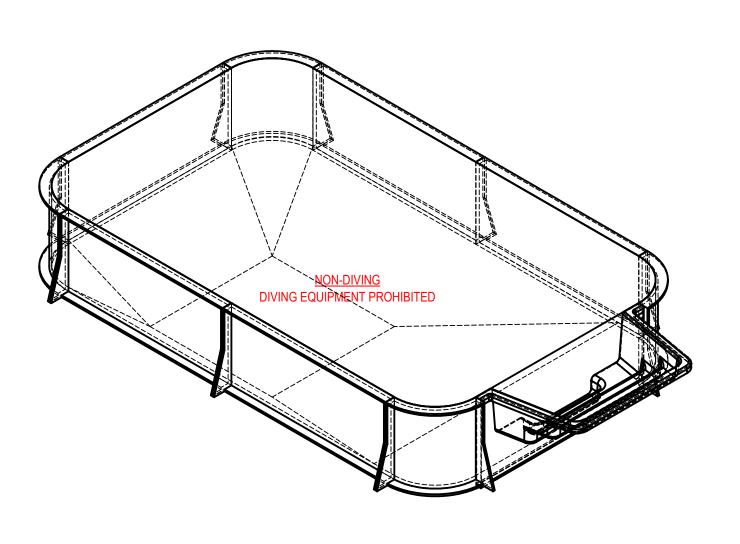

	WEIGHT:	UNLESS OTHERWISE SPECIFIED	DESIGNED BY: BUMPHREY	6/4/2013	HYDRA POOLS
~	VOLUME: Inch ³	TOLERANCES DECIMALS: X ± .1		DETAILED DATE: 12/6/2017	TITBICAT COLS
G NUMBER:	COLOR: NA HEAT TREAT:	XXX ± .001 XXXX ± .0005	LAST REVISED BY: bumphrey MATERIAL:	LAST REVISED DATE: 12/6/2017	TITLE: LAYOUT, 12' X 20', RECTANGLE, 2' RADIUS, 6' DEEP, HS110N, LIGHT, 1084, 700 SERIES
läα	NA TEXTURE	ANGULAR: $X \pm 0.5$ THIRD ANGLE PROJECTION			
ENGINEERING OT 1 C.	NA S	0 🗆			PART NUMBER: 00016883 SCALE: 1:96 SHEET: 3 OF 3 STATE